


COMBIMAX-PA-X


■ Semi-modular system

The rear **PA-X** loading deck can be combined with **PA-X** front bogies (2- or 3-axle). This results in a **continuous loading deck of 790 mm***

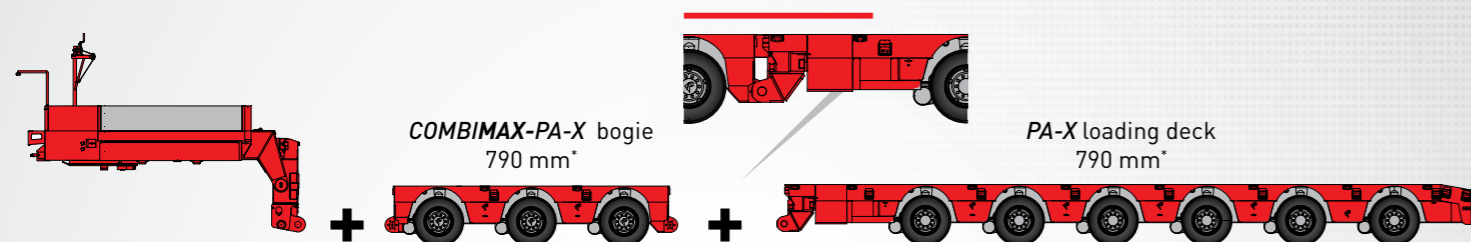


■ Modular system

The rear **PA-X** loading deck can be combined with 17.5" **CombiMAX** bogies (2-4 axles)

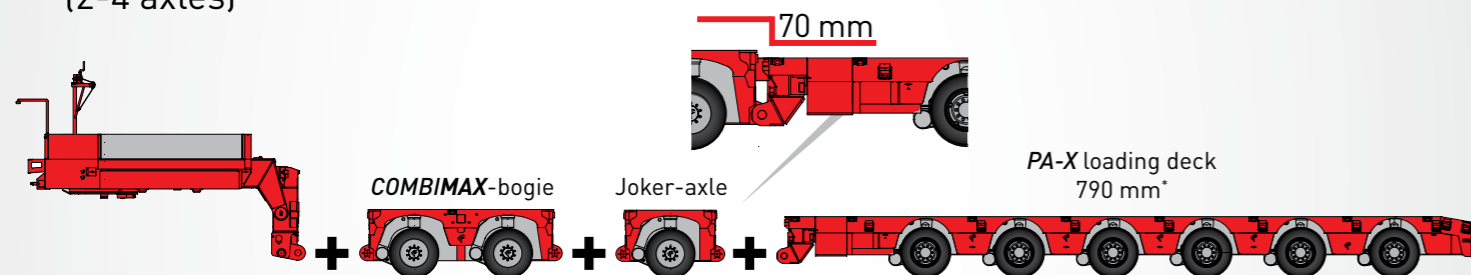


■ Possible combinations

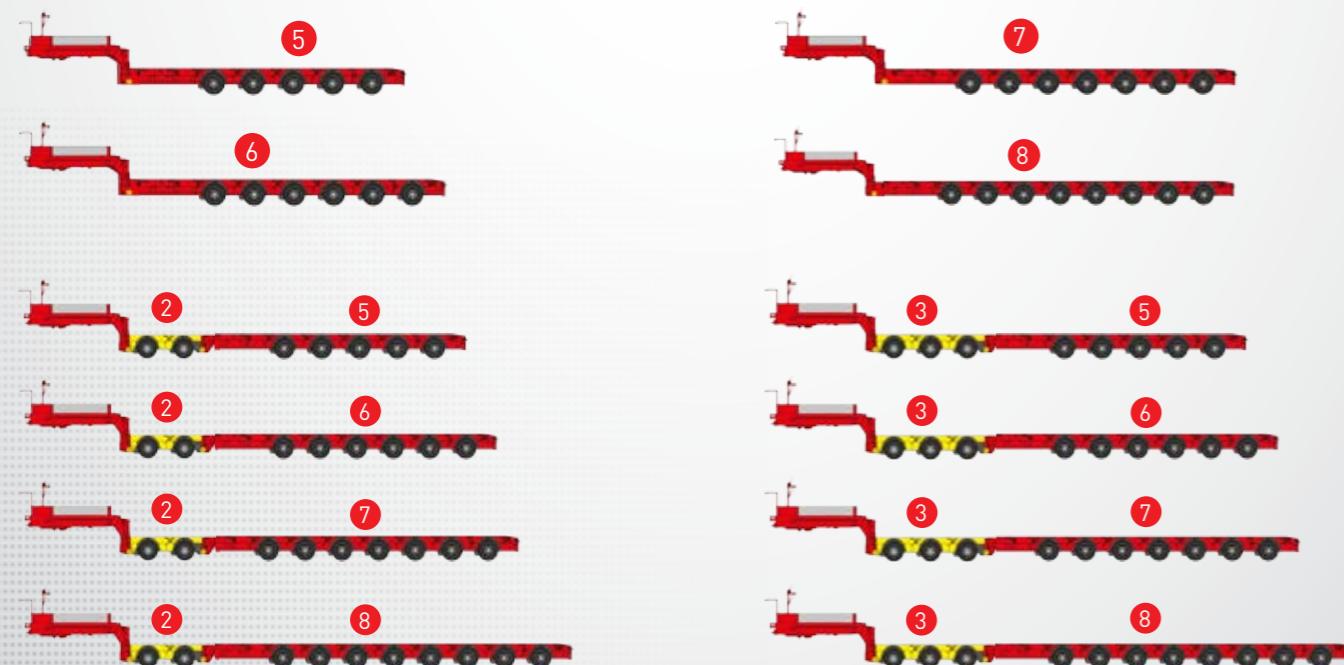

*completely lowered


MULTIMAX-PA-X

■ Optimized payload, continuous loading deck

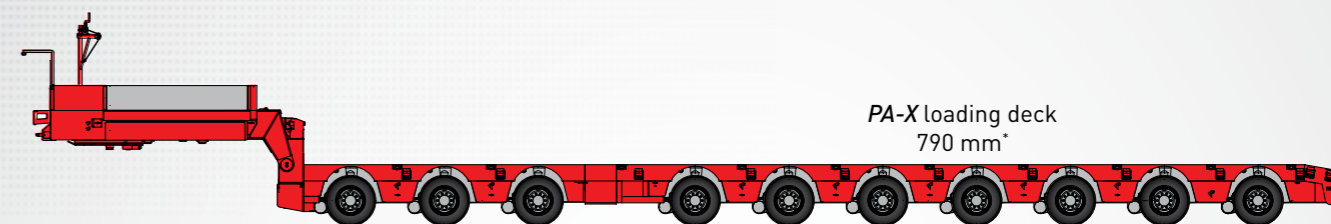

- Continuous loading height of 790 mm*
- Optimized tare weight
- Easy handling
- Available with 2.850 or 3.000 mm width
- The loading deck is single or double extendable
- Hydraulic double or single ramps optionally available

■ Possible combinations

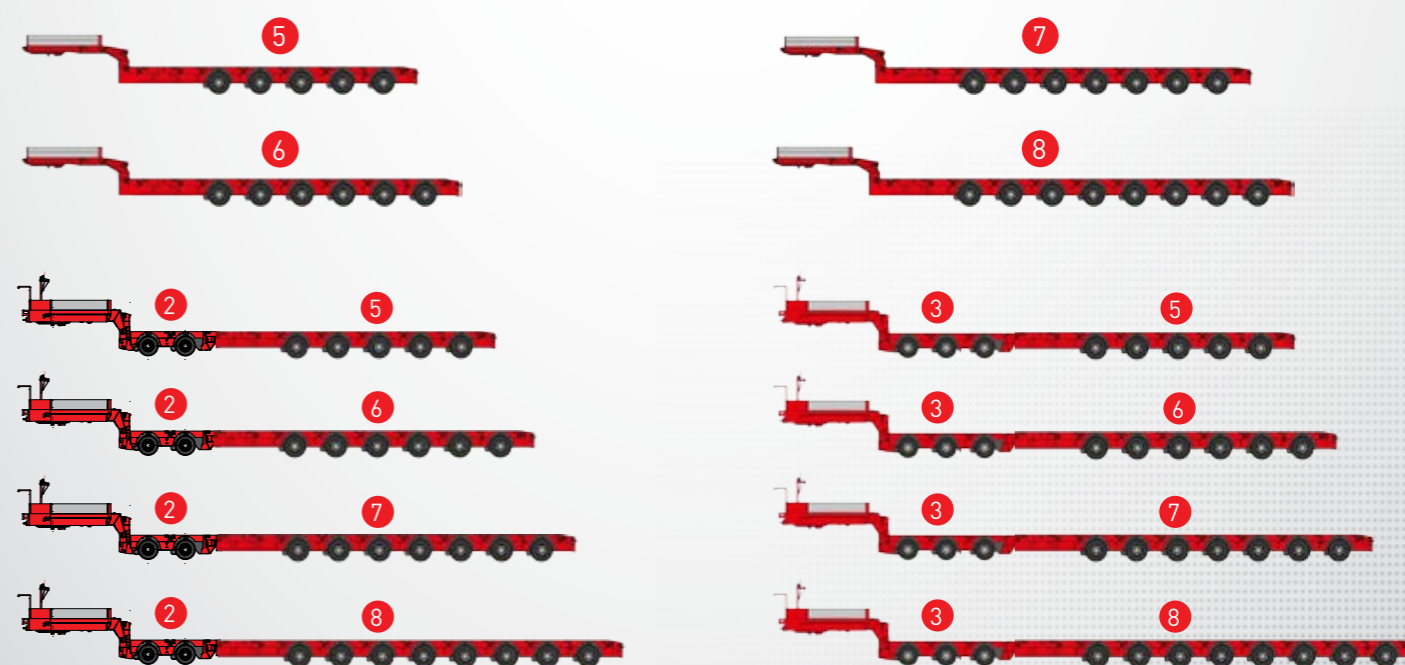

*completely lowered